


PHYSICS OF FOIL HEAT GAIN / LOSS IN BUILDINGS

There are three modes of heat transfer: CONDUCTION, CONVECTION, and RADIATION (INFRARED). Of the three, radiation is the primary mode; conduction and convection are secondary and come into play only as matter interrupts or interferes with radiant heat transfer. As the matter absorbs radiant energy, it is heated, develops a difference in temperature, and results in molecular motion (conduction in solids) or mass motion (convection in liquids and gas).

All substances, including air space and building materials, such as wood, glass and plaster, and insulation, obey the same laws of nature, and TRANSFER heat. Solid materials differ only in the rate of heat transfer, which is mainly affected by differences in: density, weight, shape, permeability and molecular structure. Materials which transfer heat slowly can be said to RESIST heat flow.

Direction of heat transfer is an important consideration. Heat is radiated and conducted in all directions, but convected primarily upward. The figures below show modes of heat loss by houses. In all cases, radiation is the dominant mode.

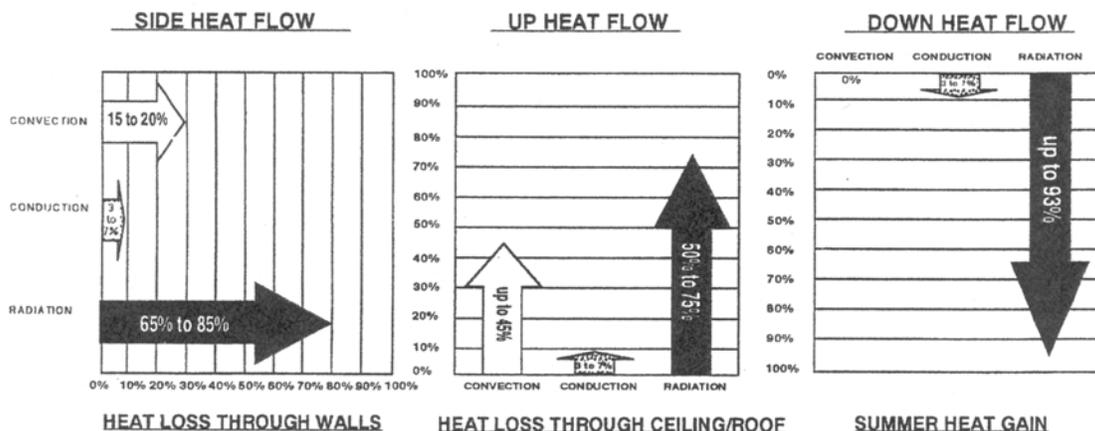

CONDUCTION is direct heat flow through matter (molecular motion). It results from actual PHYSICAL CONTACT of one part of the same body with another part, or of one body with another. For instance, if one end of an iron rod is heated, the heat travels by conduction through the metal to the other end; it also travels to the surface and is conducted to the surrounding air which is another, but less dense, body. An example of conduction through contact between two solids is a cooking pot on the solid surface of a hot stove. The greatest flow of heat possible between materials is where there is direct conduction between solids. Heat is always conducted from warm to cold; never from cold to warm, and always moves via the shortest and easiest route.

In general, the more dense a substance, the better conductor it is. Solid rock, glass and aluminum being very dense are good conductors of heat. Reduce their density by mixing air into the mass, and their conductivity is reduced. Because air has low density, the percentage of heat transferred by conduction through air is comparatively small. Two thin sheets of aluminum foil with about one inch of air space in between weigh less than one ounce per square foot. The ratio is approximately 1 of mass to 100 of air, most important in reducing heat flow by conduction. The less dense the mass, the less will be the flow of heat by conduction.

CONVECTION is the transport of heat within a gas or liquid, caused by the actual flow of the material itself (mass motion). In building spaces, natural convection heat flow is largely upward, somewhat sideways, not downwards. This is called "Free convection". For instance a warm stove, person, floor, wall, etc., loses heat by conduction to the cooler air in contact with it. This added heat activates (warms) the molecules of the air which expand, becoming less dense, and rise. Cooler heavier air rushes in from the side and below to replace it. The popular expression "hot air rises" is exemplified by smoke rising from a chimney or a cigarette. The motion is turbulently upward, with a component of sideways motion.

Convection may also be mechanically induced, as by a fan. This is called "forced convection".

RADIATION is the transmission of electromagnetic rays through space. Infrared rays occur between light and radar waves (between the 3 - 15 micron portion of the spectrum.) Henceforth, when we speak of radiation, we refer only to infrared rays. Each material whose temperature is above absolute zero (-459 F.) emits infrared radiation, including: the sun, icebergs, stoves or radiators, humans, animals, furniture, ceilings, walls floors, etc.

All objects radiate infrared rays from their surfaces in all directions, in a straight line, until they are reflected or absorbed by another object. Traveling at the speed of light, these rays are invisible, and they have **NOT** TEMPERATURE, only ENERGY. Heating an object excites the surface molecules, causing them to give off infrared radiation, when these infrared rays strike the surface of another object the rays are absorbed, and the object. This heat spreads throughout the mass, by conduction. The heated rays from exposed surfaces by radiation, if these surfaces are exposed directly on

The amount of radiation emitted is a function of the **EMISSIVITY** factor of the source's surface. **EMISSIVITY** is the rate at which radiation (**EMISSION**) is given off. Absorption of radiation by an object is proportional to the absorptivity factor of its surface, which is the reciprocal of its emissivity.

Although The two objects may be identical, if the surface of one were covered with a material of 90% emissivity, and the surface of the other with a material of 5% emissivity there would result a drastic difference in the rate of radiation flow from these two objects. This is demonstrated by comparison of four identical, equally heated iron radiators covered with different materials. Paint one with aluminum paint and another with ordinary enamel. Cover the third with asbestos and the fourth with aluminum foil. Although all have the same temperature, the one covered with aluminum foil would radiate the least [lowest (5%) emissivity] The radiators covered with ordinary paint or asbestos would radiate most, because they have the highest, emissivity, (even higher than the original iron.) Painting over the aluminum paint or foil with ordinary paint changes the surface to 90% emissivity.

Materials whose surfaces do not appreciably reflect infrared rays, for example paper, asphalt, wood, glass and rock, have absorption and emissivity rates ranging from 80% to 93%. Most materials used in buildings, brick, stone, wood, paper and so on regardless of their color, absorb infrared radiation at about 90%. It is interesting to note that a mirror of glass is an excellent reflector of light but a very poor reflector of infrared radiation. Mirrors have about the same reflectivity as a heavy coating of black paint.

The surface of aluminum has the ability **NOT TO ABSORB**, but to **REFLECT**, 95% of the infrared rays which strikes it. Since aluminum foil has such a low mass to air ratio, very little conduction can take place, particularly when only 5% of the rays are absorbed.

TRY THIS EXPERIMENT: Hold a sample of **FOIL INSULATION** close to your face, without touching. Soon you will feel your own infrared rays bouncing back from the **SURFACE**. The explanation: The emissivity of heat radiation of the surface of your face is 99%. The absorption of aluminum is only 5% of the rays. The absorption rate of your face is 99%. The net result is that you feel the warmth of your own face reflected.

REFLECTIVITY AND AIRSPACES


In order to retard heat flow by conduction, walls and roofs are built with internal air spaces. Conduction and convection through these air spaces combined represent only 20% to 35% of the heat, which pass through them.

In both winter and summer, 65% to 80% of the heat that passes from a warm wall to a colder wall or through a ventilated attic does so by radiation.

The value of air spaces as thermal insulation must include the character of the enclosing surfaces. The surfaces greatly affect the amount of energy transferred by radiation, depending on the material's absorptivity and emissivity, and are the only way of modifying the total heat transferred across a given space. The importance of radiation cannot be overlooked in problems involving ordinary room temperatures.

The following test results illustrate how heat transfer across a given air space may be modified. The distance between the hot and cold walls is 1 1/2" and the temperatures of the hot and cold surfaces are 212 degrees and 32 degrees respectively. In **CASE 1**, the enclosing walls are paper, wood, asbestos or other similar material. In **CASE 2**, the walls are lined with aluminum foil. In **CASE 3**, two sheets of aluminum foil are used to divide the enclosure into three 1/2" spaces.

PHYSICS OF FOIL HEAT GAIN / LOSS IN BUILDINGS

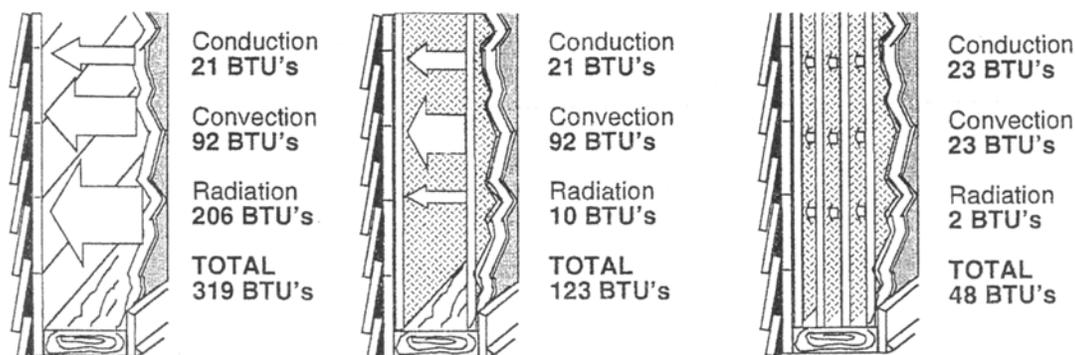

Case 1. Un-insulated Wall Space

The surfaces of ordinary building materials including ordinary bulk insulation have a radiation or emissivity rate of about 90%, a heat ray absorption rate of over 90%. Air has low density so conduction is slight (only 21 BTU's). Convection currents transfer 92 BTU's

Case 2. The Same Wall Space

Except that the inner surfaces were lined with sheets of aluminum foil of 5% emissivity and absorptivity. -Note the drastic drop in heat flow by radiation from 206 BTU's to 10 BTU's. Conduction and convection are unchanged. The original total heat loss of 319 BTU's drops to 123 BTU's.

Case 3. Two Sheets of 5% Emissive Aluminum Foil

divide the wall space into 3 reflective compartments. Heat loss by radiation drops 94% from case 1. The 2 interior sheets retard convection so that its flow falls 75%. Conduction rises only 2 BTU's, from 21 BTU's to 23 BTU's. The total heat loss drops 85% from case 1.

Reflection and emissivity by surfaces can ONLY occur in SPACE. The ideal space is any dimension 3/4" or more. Smaller spaces are also effective, but decreasingly so. **Where there is no air space, we have conduction through solids.** When a reflective surface of a material is attached to a ceiling, floor or wall, that particular surface ceases to have radiant insulation value at the points in contact. Therefore, care must be exercised, when installing FOIL INSULATION, that it be stretched sufficiently to insure that any inner air spaces are properly opened up and that metal does not touch metal. Otherwise, conduction through solids will result at the point of contact. Heat control with aluminum foil is made possible by taking advantage of its low thermal emissivity and the low thermal conductivity of air. It is possible with layered foil and air to practically eliminate heat transfer by radiation and convection: a fact employed regularly by the NASA space program. In the space vehicle Columbia, ceramic tiles are embedded with aluminum bits which reflect heat before it can be absorbed. "Moon suits" are made of reflective foil surfaces surrounding trapped air for major temperature modification.

HEAT LOSS THROUGH AIR

There is no such thing as a "dead" air space as far as heat transfer is concerned, even in the case of a perfectly air-tight compartment such as a thermos bottle. Convection currents are inevitable with differences in temperature between surfaces when air or some other gas is present inside. Since air has some density, there will be some heat transfer by conduction if any surface of a so called "dead" air space is heated. Finally, radiation, which accounts for 50% to 80% of all heat transfer, will pass through air (or a vacuum) with ease, just as radiation travels the many million miles that separate the earth from the sun.

Aluminum foil, with its reflective surface can block the flow of radiation. Some foils have higher absorption and emissivity qualities than others. The variations run from 2% to 72%, a differential of 2000%. Most aluminum insulation has only 5% absorption and emissivity ratio. It is impervious to water vapor and convection currents, and reflects 95% of all radiant energy that strikes its air-bounded surfaces. The performance of most aluminum insulation is unsurpassed for upward winter heat flow and it has an added efficiency for downward summer heat flow because of the absence of convection currents.

Note: 65% (206) BTU's of the total BTUs going through this wall space is radiation Note: Aluminum has 3% to 5% emissivity and absorptivity.

HEAT LOSS THROUGH FLOORS

Heat is lost through floors primarily by radiation (up to 93%). When ALUMINUM insulation is installed in the ground floors and crawl spaces of cold buildings, it prevents the heat rays from penetrating down, reflecting the heat back into the building, thereby warming the floor surfaces. Since aluminum is non-permeable, it is unaffected by ground vapors.

CONDENSATION

Water vapor is the gas phase of water. As a gas, it will expand or contract to fill any space it may be in. In a temperature, there is a limited amount of vapor that can be suspended. Any excess will turn into water. The point just before condensations commences is called 100% saturation. The CONDENSATION FORMS WHENEVER AND WHEREVER VAPOR REACHES DEW POINT.

VAPOR LAWS

1. The higher the temperature, the more vapor the air can hold; the lower the temperature, the less vapor.
2. The larger the spaces, the more vapor it can hold; the smaller the space, the less vapor it can hold.
3. The more vapor in a given space, the greater will be its density.
4. Vapor will flow from areas of greater vapor density to those of lower vapor density.
5. Permeability of insulation is a prerequisite for vapor transmission; the less permeable, the less vapor transfer.

The average water vapor saturation is about 65%. If a room was vapor-proofed, and the temperature was gradually lowered, the percentage of saturation would rise until it reached 100%, although the amount of vapor would remain the same. If the temperature were further lowered the excess amount of the vapor for that temperature in that amount of space would fall out in the form of condensation. This principle is visibly demonstrated when we breathe in cold places. The warm air in our lungs and mouth can support the vapor, but the quantity is too much for the colder air, and so the excess vapor for that temperature condenses and the small particles of water become visible.

In conduction, heat flows to cold. The under surface of a roof, when cold in the winter, extracts heat out of the air with which it is in immediate contact. As a result, that air drops in temperature sufficiently to fall below the dewpoint (the temperature at which vapor condenses on a surface). The excess amount of vapor for that temperature, that falls out as condensation or frost attaches itself to the underside of the roof.

Water vapor is able to penetrate plaster and wood readily. When the vapor comes in contact with materials within those walls having a temperature below the dew point of the vapor, they form moisture or frost within the walls. This moisture tends to accumulate over long periods of time without being noticed, which, in time, can cause building damage.

To prevent condensation a large space is needed between outer walls and any insulation, which permits vapor to flow through. Reducing the space or the temperature converts vapor to moisture that is then retained. The use of separate vapor barriers or insulation that is also a vapor barrier are alternative methods to deal with this problem. Aluminum is impervious to water vapor and with the trapped air space is immune to vapor condensation.

TESTING THERMAL VALUES

U FACTOR is the rate of heat flow in BTU's in one hour through one sq. ft. area of ceilings, roofs, walls or floors, including insulation (if any) resulting from a 1degree F. temperature difference between the air inside and the air outside.

MEMORYJOGGER: U = BTU's flowing in ONE sq. ft. for ONE degree change.

R FACTOR or RESISTANCE to heat flow is the reciprocal of U; in other words, 1/U. The smaller the U factor fraction, the larger the R factor, the better the insulation ability to stop conductive heat flow. Note: neither of these factors include radiation or convection flow. There are, at present, two kinds of techniques generally used by accepted laboratories to measure thermal values: the guarded hot plate and the hot box methods. The results obtained seem to vary between the two methods. Neither technique simulates heat flow through insulation in actual everyday usage. Thermal conductivity measurements as made in completely dry state in the laboratory will not match the performance of those same insulations under actual field conditions.. Most mass type insulating materials become better conductors of heat when the relative humidity increases because of the absorption of moisture by the insulator. (Try keeping your feet warm in a pair of wet socks).

Therefore, **mass insulations, which normally contain at least the average amount of moisture that is in the air, are first completely dried out before testing. In aluminum insulations, there is no moisture problem.** Aluminum foil is one of the few insulating materials that is not affected humidity and, consequently, its insulating value remains unchanged from the "bone dry" state to very high humidity conditions. **The R Value of a mass type insulation is reduced by over 35% with only a 1-1/2% moisture content (i.e., from R13 to R8.3).** The moisture content of insulation materials in homes typically exceeds 1- 1/2%.

In spite of the advances made by space technology, in insulation systems based on understanding and modifying the effects of radiation, no universally accepted laboratory method has yet been devised to measure and report the resistance to heat flow of multi-layer foil. Until such a method, that will satisfy rigorous laboratory demands, is devised, we must be content to make our judgments on the basis of common sense and experience.

There are many different types, grades and qualities of aluminum foil insulation designed for a variety of applications. Matching the correct foil product to the specific job is extremely important to maximize final performance.

*** The National Bureau of Standards, in it's booklet BMS53, 'Effect of Ceiling Insulation Upon Summer' lists 2 layers of aluminum foil as the most effective insulation in protecting the ceiling against summer heat.*